


The Name
for Safety.




ZURRPUNKTE ZKS-MODUL TWN 1476


- Max. Zurrkraft (LC) 10.000 daN
- 100% Zurrkraft (LC) in alle Richtungen
- Einfache und sichere Montage an Seitenrahmen
- Stabiler Zurrpunkt (lange Lebensdauer)
- Kleinster Zurrwinkel 30° zur Ladefläche
- Schwenkbereich von 150°
- Erfüllt Anforderungen der EN 12 640
- Drehbar (Unfallvermeidung)
- Schweißanleitung im Lieferumfang enthalten
- 100% rissgeprüft
- TÜV-Zulassung
- Nahezu für alle Rahmenprofile von Tiefbett-Sattelaufleger geeignet (Anpassung auf Anfrage)



NEU: 100% ZURRKRAFT IN ALLE RICHTUNGEN

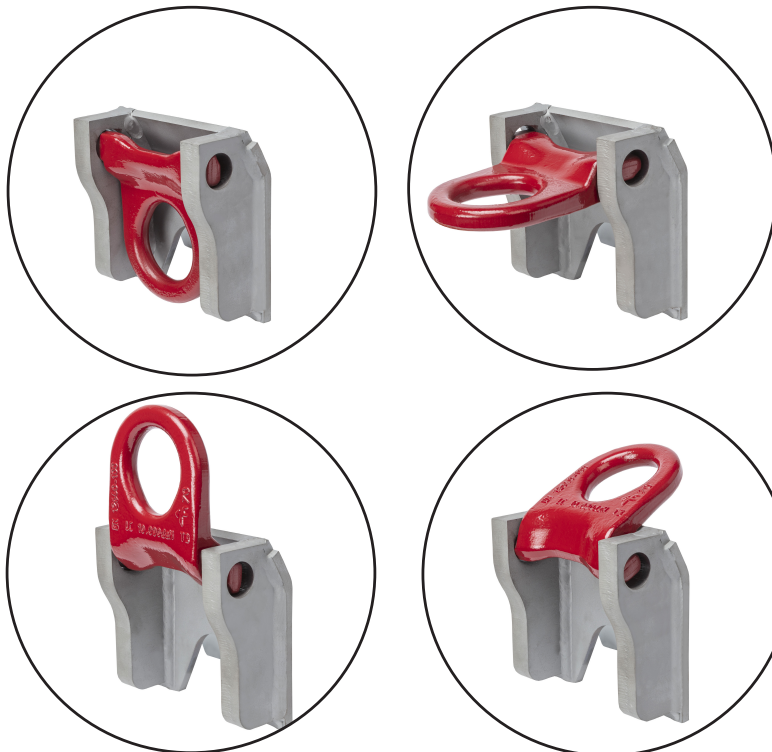

The Name
for Safety.



LASHING POINTS ZKS-MODUL

TWN 1476

- Max. 10.000 daN Lashing Capacity
- 100% Lashing Capacity (LC) in all directions
- Easy and safe mounting at the side frames
- Stable Lashing Point (long service life)
- Smallest lashing angle 30° to the loading area
- Swivel range of 150°
- Complies with EN 12640
- Rotatable (accident prevention)
- Welding instruction included in the scope of supply
- 100% crack tested
- TÜV approval
- Suitable for almost every frameprofile of low deck trailers (adjustment on request)



NEW: 100% LASHING CAPACITY IN ALL DIRECTIONS

